
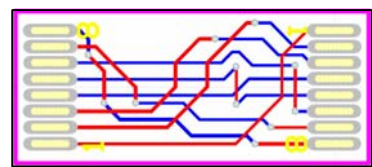
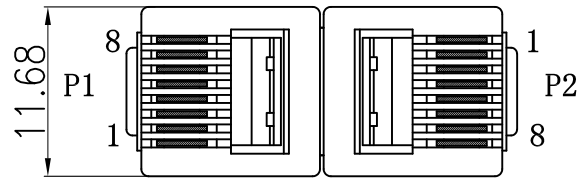


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	25.05.13

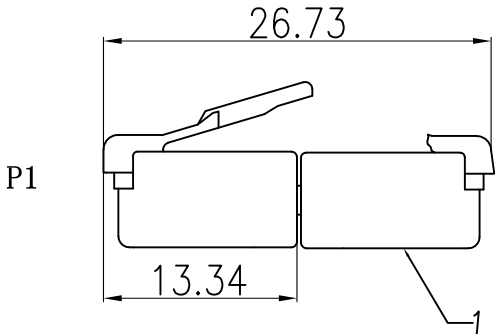

SPECIFICATION

MATERIAL:

- 1.Modular Plug: 8P8C Short L=13.34
- 2. PCB

ELECTRICAL:

- 1.Open, Short, Miswire 100% test;
- 2.Insulation resistance: 10M Ω min/DC 500V;
- 3.Contact resistance: 5 Ω max;

ENVIRONMENTAL:

- 1.Operation temperature: -10 $^{\circ}$ C~+60 $^{\circ}$ C;
- 2.Storage temperature: -10 $^{\circ}$ C~+40 $^{\circ}$ C
relative humidity <80%.

CONTACT		
P1	COLOR	P2
1	PCB	1
2		2
3		3
4		4
5		5
6		6
7		7
8		8

UNLESS OTHERWISE SPECIFED TOLERANCES		Coorle Technology		
DECIMALS:	ANGLES:	TITLE	PLUG RJ45 8P8C TO RJ45 8P8C L=26.7	
X : $\pm$ 0.20	X : $\pm$ 3 $^{\circ}$	DWN	Michael 25.05.13	PART-NO:
X.X : $\pm$ 0.10	X.X : $\pm$ 1 $^{\circ}$	CHKD		UNIT: mm
X.XX : $\pm$ 0.05		APVD		SHEET:1 OF 1
ENGINEERING COPY				