

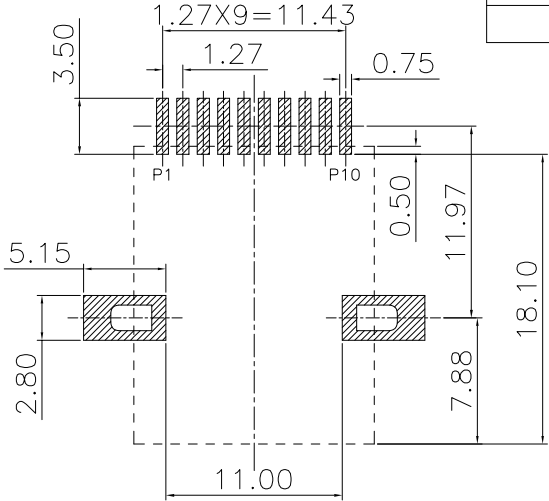
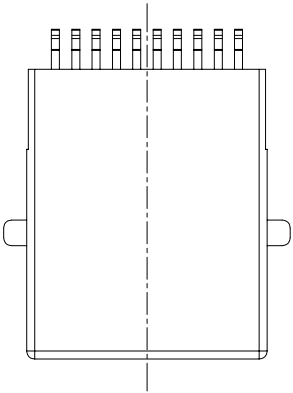
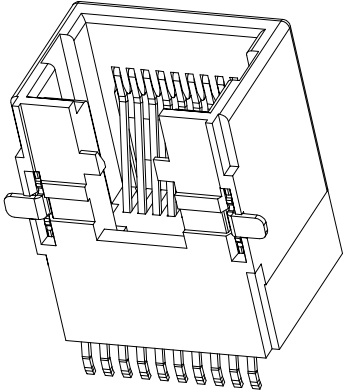
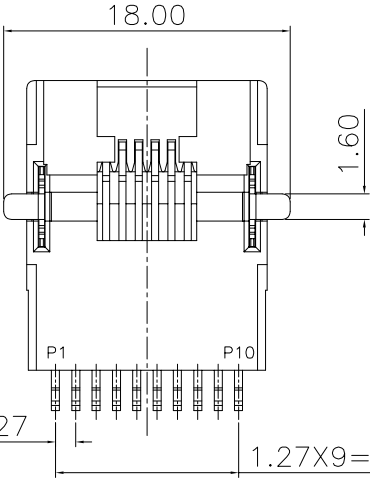



RoHS


REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)		

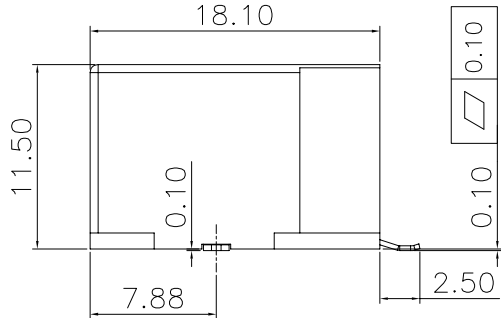

PCB LAYOUT/TOP VIEW
TOLERANCE=±0.05



- SPECIFICATION NOTES:
- ELECTRICAL:
- 1. VOLTAGE RATING:125 VAC RMS
 - 2. CURRENT RATING:1.5AMP
 - 3. CONTACT RESISTANCE:30mΩ MAX
 - 4. INSULATION RESISTANCE:500mΩ MIN AT 500V DC
 - 5. DIELECTRIC STRENGTH:1000V AC TO 1500V DC RMS@ 0.5mA 50Hz TO 60Hz 1 MINUTE
- MECHANICAL:
- 1. HOUSING/INSERT MATERIAL:THERMOPLASTIC, PA9T UL94V-0 RATED,COLOR BLACK
 - 2. CONTACT TERMINAL:Phosphor bronze T=0.30 PLATING NI30-50U". SN 100U"MIN. CONTENT AREA PLATED GOLD 6U"
 - 3. SMT PIN MATERIAL:Copper Alloy T=0.35 PLATED NI30-50U", SN100U"MIN
 - 4. OPERATING LIFE:750 CYCLES MIN.
 - 5. MATING/UNMATING FORCE:30N MAX
 - 6. RETENTION STRENGTH:50N FOR60S±5S.
- ENVIRONMENTAL:
- 1. STORAGE:-40℃ TO +85℃ RELATIVE HUMIDITY<80%.
 - 2. OPERATION:-40℃ TO +85℃



UNIT: mm [inch]

TOLERANCE:
X.X ±0.35
X.XX ±0.25
X.XXX ±0.15
Angle ±3.0°

SCALE:1:1 SIZE:A4

Coorle Technology

DESIGN:	PART NAME: RJ45 90度 全塑 外贴 SMT 10P10C 无柱	
CHECKED:	PART NO.	
APPROVED:	DRAW NO.	
	SHEET NO.	1 OF 1

RoHS

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)		


A

B


C

D

E

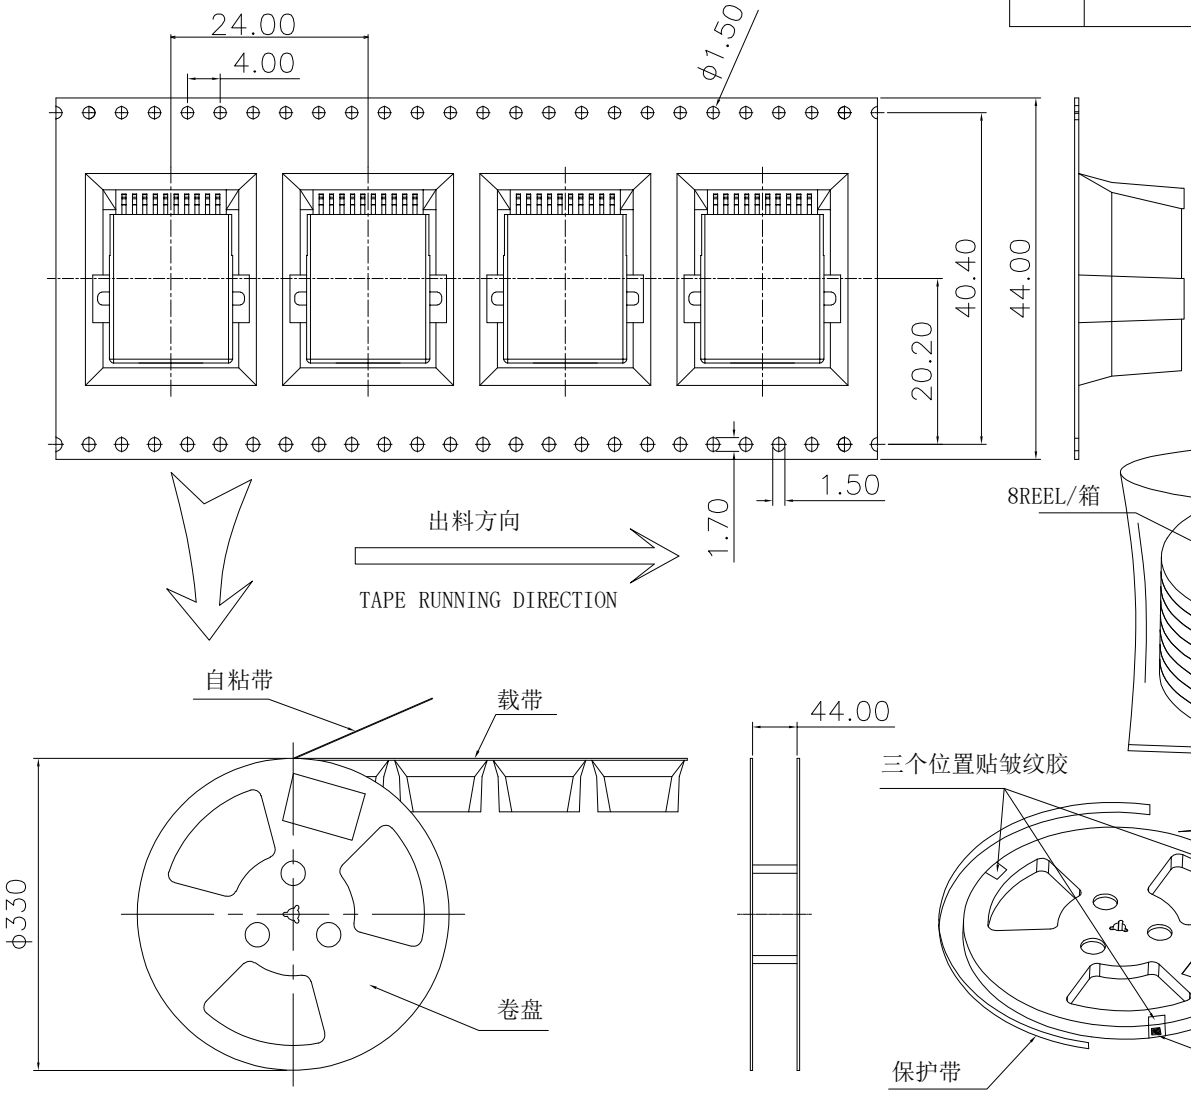

备注:
1. 包装数量200PCS/卷; 8卷1600PCS/箱;
当订单量和尾数不足时, 可以合理选择纸箱规格
2. 纸箱封盖后用封箱胶纸封箱, 并于侧面贴出货标签
3. 外箱规格: 35X35X40CM
卷盘规格: ϕ 330*44.00MM

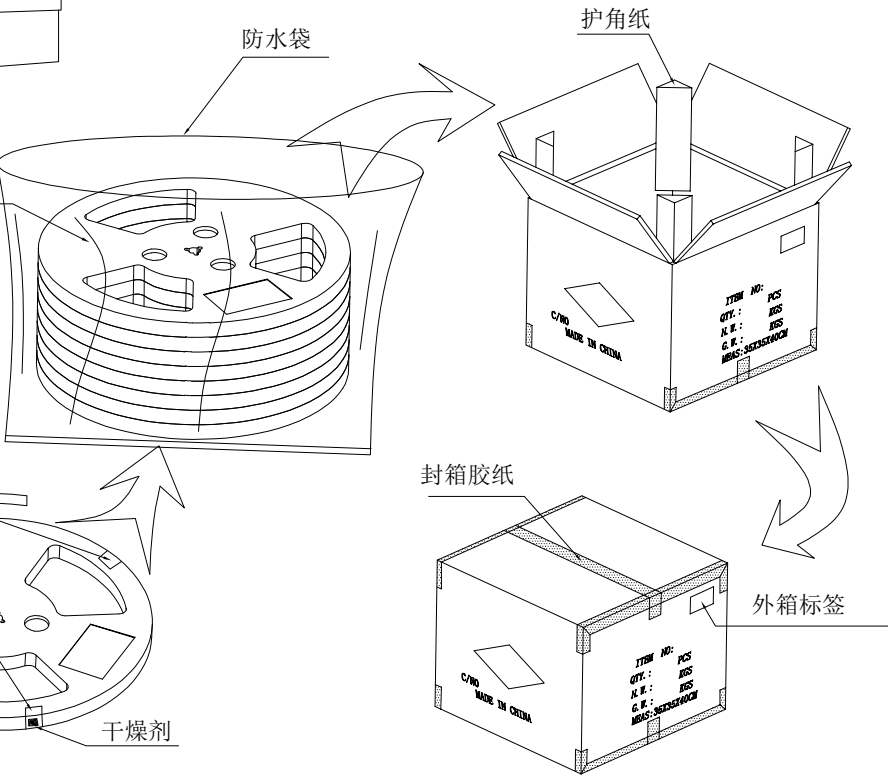

Front segment empty 14 Middle package product 200PCS Later segment empty 14
前段空14格 中间封装产品200PCS 后段空14格

6	外纸箱	1	PCS
5	护角纸	4	PCS
4	防水袋	1	PCS
3	干燥剂	8	PCS
2	保护带	8	SET
1	卷盘/载带/自粘带	8	SET
序号	包装名称	数量	单位

Coorle Technology

UNIT: mm [inch]

TOLERANCE:
X.X ±0.35
X.XX ±0.25
X.XXX ±0.15
Angle ±3.0°

SCALE:1:1 SIZE:A4

DESIGN:

CHECKED:

APPROVED:

PART NAME:
RJ45 90度 10P10C 包装规范

PART NO.

DRAW NO.

SHEET NO.

1 OF 1