


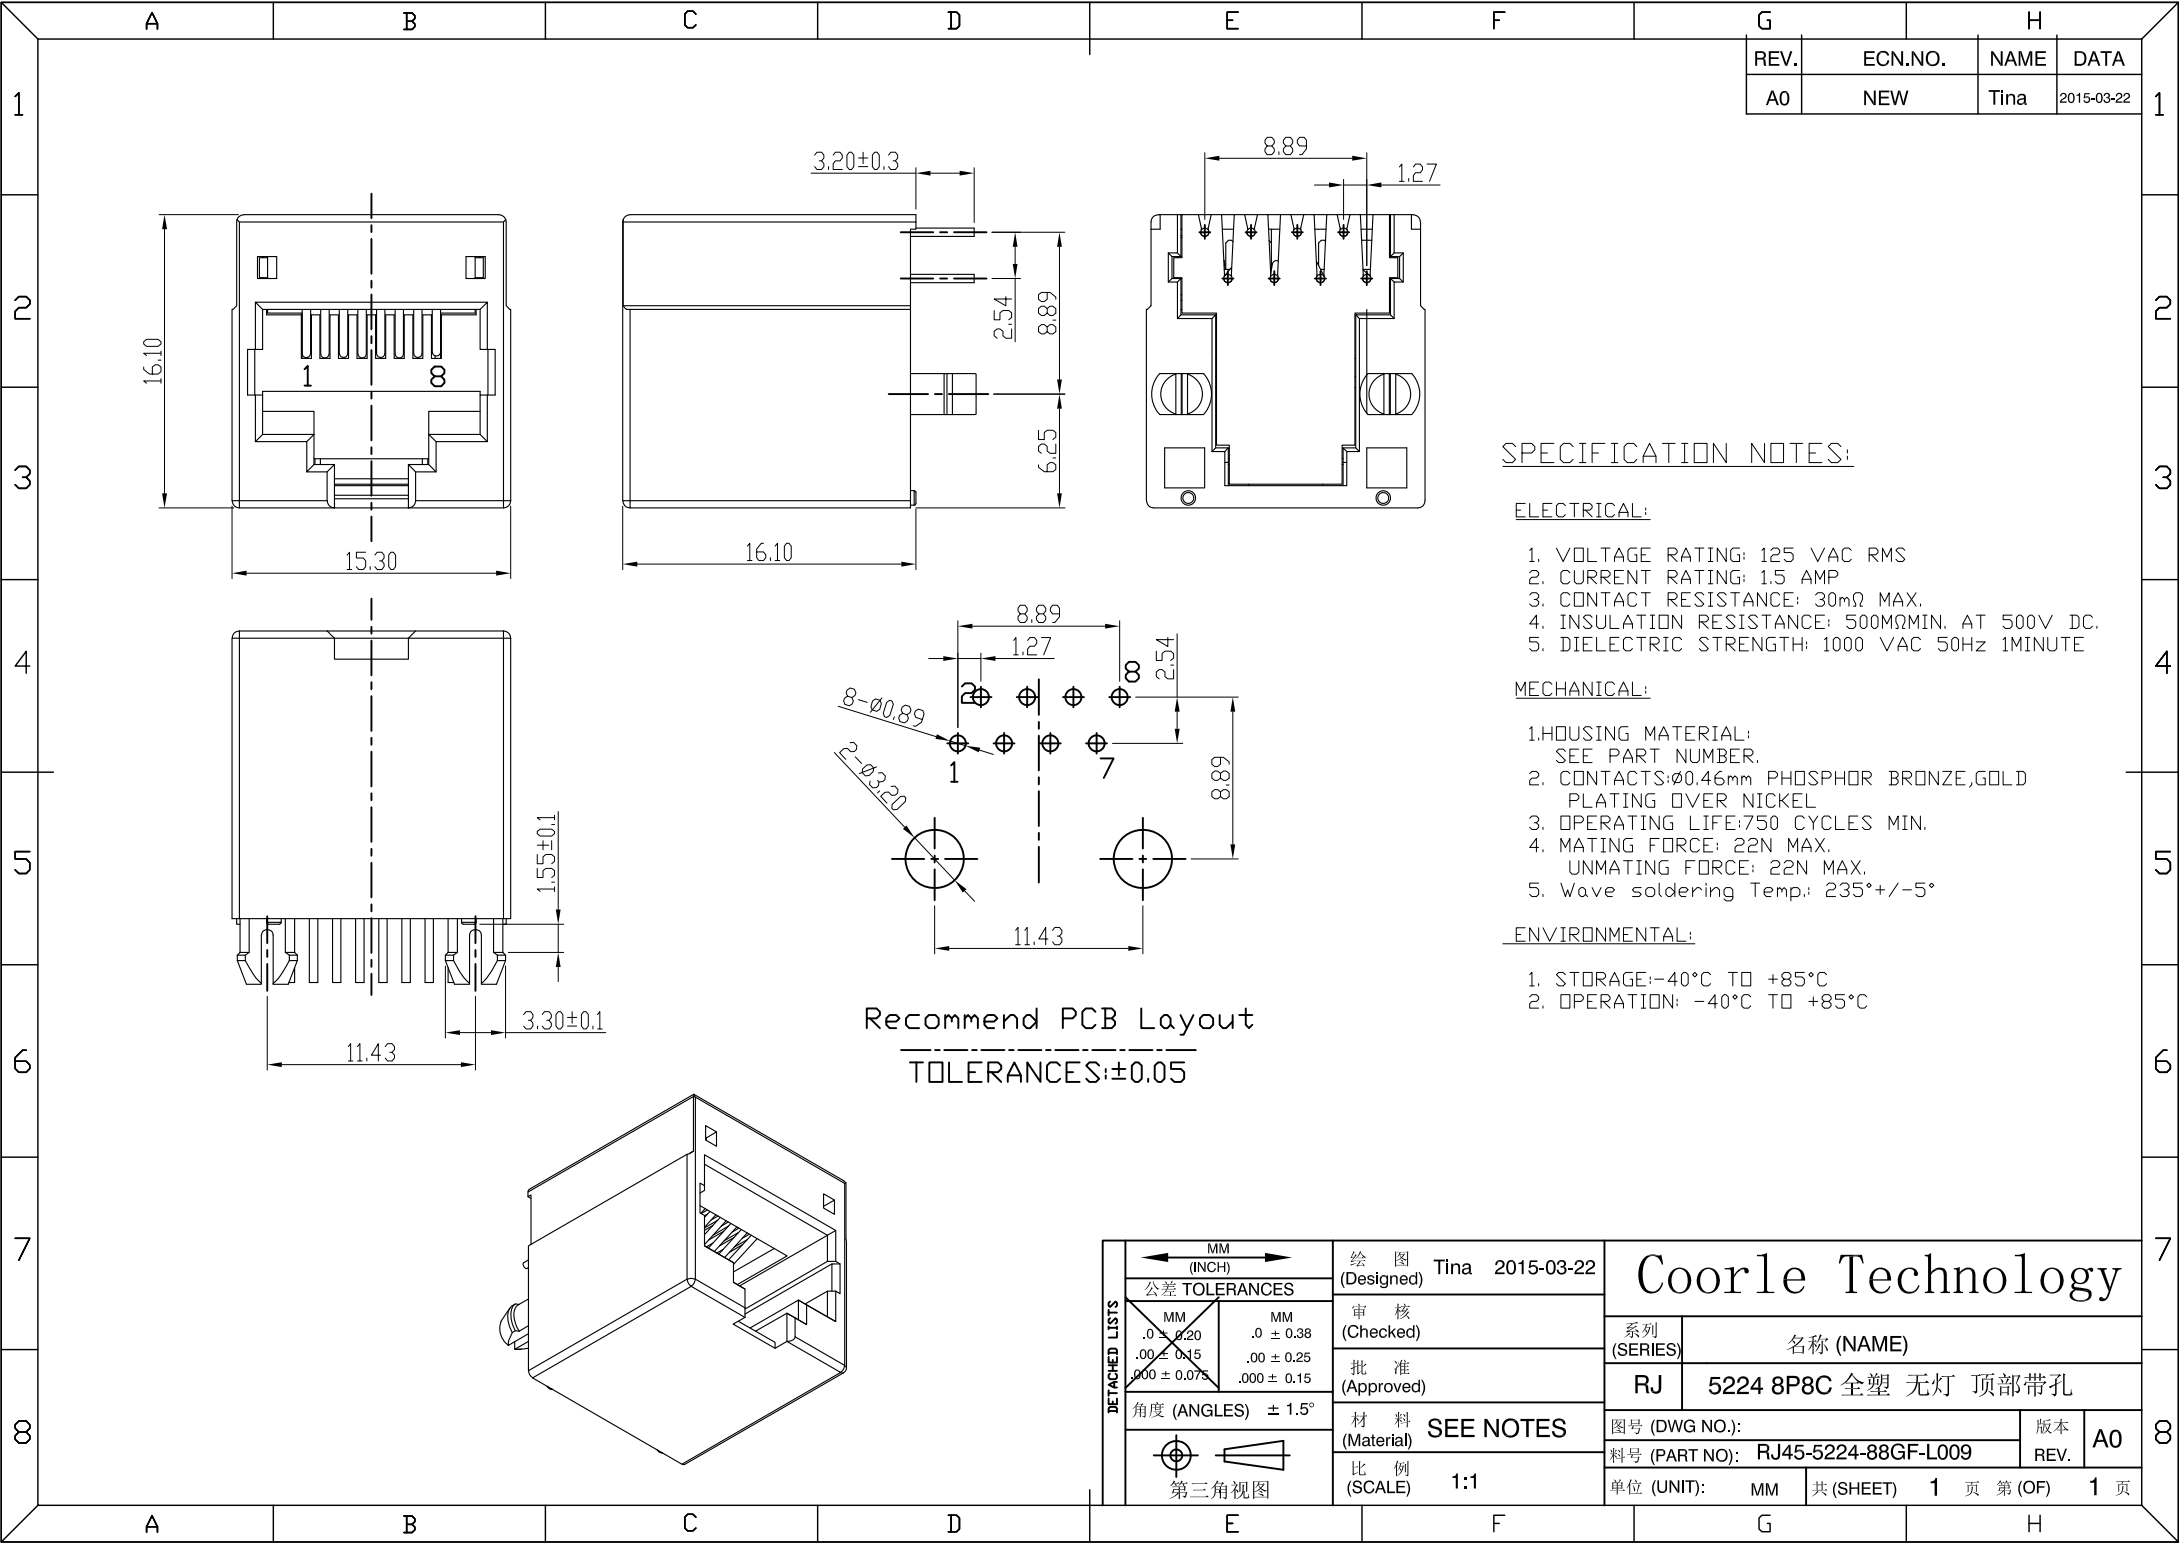

G		H	
REV.	ECN.NO.	NAME	DATA
A0	NEW	Tina	2015-03-22

SPECIFICATION NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING: 125 VAC RMS
- 2. CURRENT RATING: 1.5 AMP
- 3. CONTACT RESISTANCE: 30mΩ MAX.
- 4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- 5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE


MECHANICAL:

- 1.HOUSING MATERIAL:
SEE PART NUMBER.
- 2. CONTACTS:Ø0.46mm PHOSPHOR BRONZE,GOLD
PLATING OVER NICKEL
- 3. OPERATING LIFE:750 CYCLES MIN.
- 4. MATING FORCE: 22N MAX.
UNMATING FORCE: 22N MAX.
- 5. Wave soldering Temp.: 235°+/-5°

ENVIRONMENTAL:

- 1. STORAGE:-40°C TO +85°C
- 2. OPERATION: -40°C TO +85°C

Recommend PCB Layout
TOLERANCES:±0.05

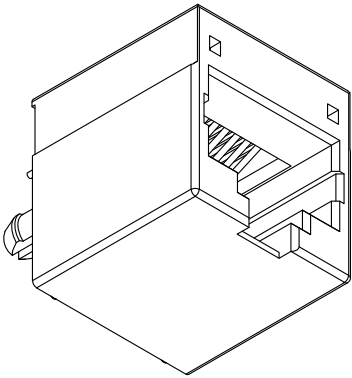

DETACHED LISTS	MM (INCH)		绘图 (Designed) Tina 2015-03-22		Coorle Technology	
	公差 TOLERANCES		审核 (Checked)		系列 (SERIES)	名称 (NAME)
	MM	MM	批准 (Approved)		RJ	5224 8P8C 全塑 无灯 顶部带孔
	.0 ± 0.20	.0 ± 0.38	材料 (Material) SEE NOTES		图号 (DWG NO.):	
	.00 ± 0.15	.00 ± 0.25	比例 (SCALE) 1:1		料号 (PART NO): RJ45-5224-88GF-L009	
角度 (ANGLES) ± 1.5°		.000 ± 0.075			单位 (UNIT): MM	共 (SHEET) 1 页 第 (OF) 1 页
第三角视图					版本 (REV.)	A0