

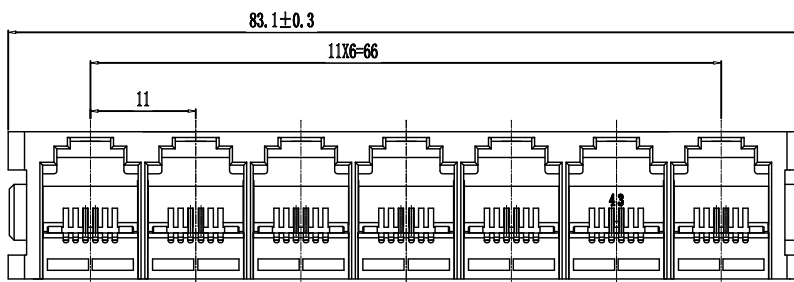
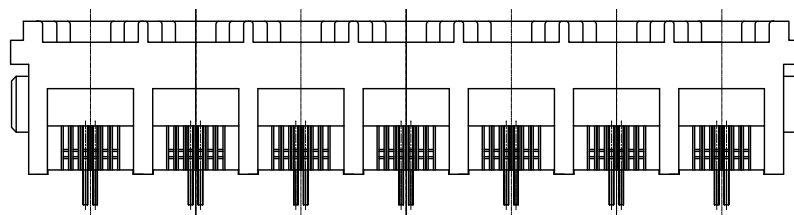


RoHS compliant

PC Board Layout

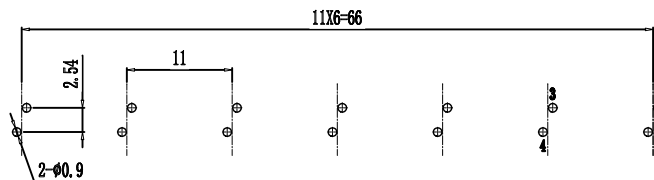

SPECIFICATIONS :

MATERIAL:

1. HOUSING MATERIAL: (1)GLASS FILLED PA66(UL94V-0), (2)GLASS FILLED PA46(UL94V-0), (3)GLASS FILLED PBT(UL94V-0).
2. CONTACT MATERIAL:PHOSPHOR BRONZE $\phi 0.46\text{MM}$.
3. PLATING: GOLD PLATING $\text{Fu}''\text{-}50\mu''\text{OVER NICKEL}$.

ELECTRICAL:

1. VOLTAGE RATING:125Vac RMS .
2. CURRENT RATING:1.5AMP .
3. CONTACT RESISTANCE:30m Ω MAX .
4. INSULATION RESISTANCE:500M Ω MIN @ 500Vdc .
5. DIELECTRIC WITHSTANDING VOLTAGE:1000Vac RMS 50Hz 1MIN.

MECHANICAL:

1. DURRABILITY :750 CYCLES MIN.
2. INSETION FORCE:30N MAX.
3. RETENTION STRENGTH :7.7Kgf MIN BETWEEN JACK AND PLUG.

ENVIRONMENTAL:

1. STORAGE TEMPERATURE : -40° C TO 85° C.
2. OPERATION TEMPERATURE : -40° C TO 70° C.

TOLERANCE UNLESS OTHERWISE SPEC							品名 Classification	5225 1X7 6P2C 180° 无铁脚一体				
BASIC DIMENSION	TOLERANCE						料号 Material No					
.I	±0.5						图样标记	数量 QTY	重量 Weight	比例 SCALE	尺寸 SIZE	单位 UNIT
.XX	±0.35											
.XXX	±0.25	标记 Mark	数量 Number of places	文件号 Doc.No.	签名 Sign	日期 Date				1:1	M	mm
ANGLES	±0.5°	设计 Designed			标准化 Standardize		共 1 张 第 1 张					
		校对 Proofread			审核 Check		Coorle Technology					
		工艺 Technology			批准 APPROVED							