
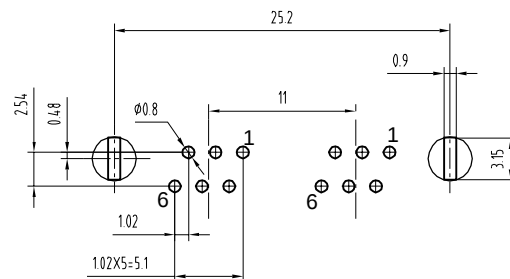
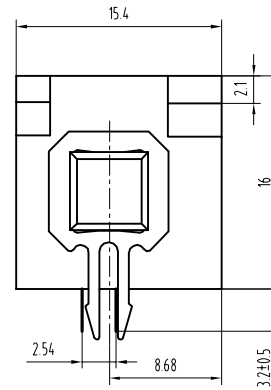
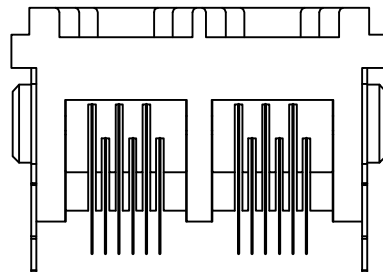


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	C

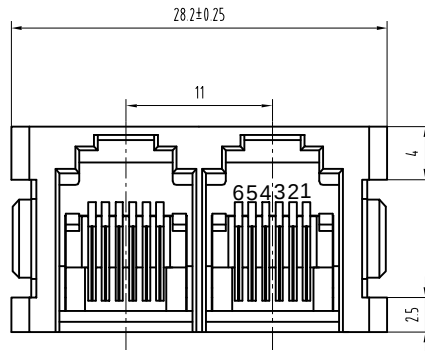

PC Board Layout
Component Side Shown

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C
2. OPERATION : 0°C TO 70°C.

DETACHED LISTS THIRD ANGLE PROJECTION	MM INCH	DFTO SHB MFO	DATE 2007.05.03 DATE 2007.05.03	Coorle Technology	
	TOLERANCES EXCEPT AS NOTED	CHKD LAMBDO APPVL	DATE 2007.05.03 DATE		
	MM .1 ± 0.15 .001 ± 0.005	MATERIAL :	Q.T.Y :	TITLE 5225 JACK 180° 6P6C 1*2	
	ANGLES ± 0.5	FINISH :	SCALE :	DRAWING NO. /PART NO.	SIZE A3
	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	SHEET X OF		