REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

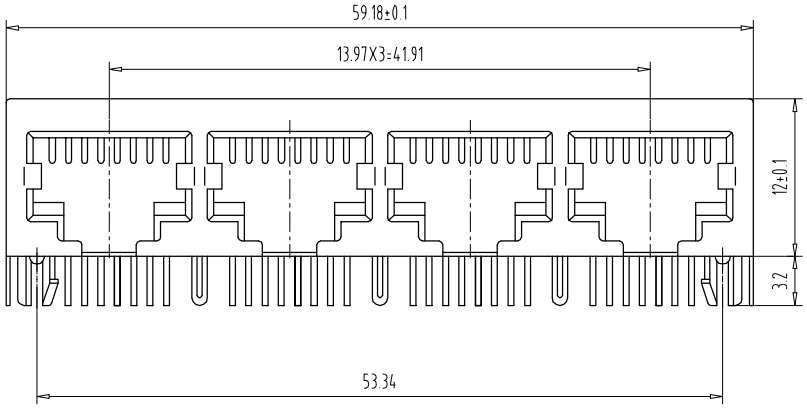

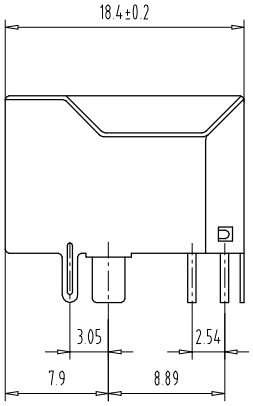

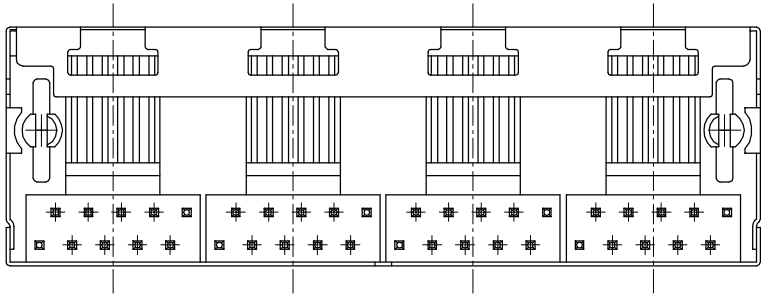

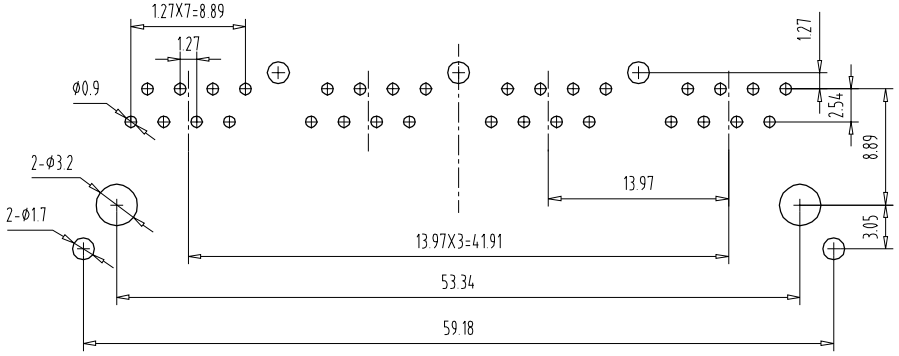

PC Board Layout

Component Side Shown

NOTES:

MATERIAL :

1.HOUSING MATERIAL	:GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL	:PHOSPHOR BRONZE Ø0.45mm.
3.PLATING	:GOLD PLATING OVER NICKEL.
4.SHIELD	:0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:

1.VOLTAGE RATING	:125 VAC RMS.
2.CURRENT RATING	:1.5 AMP.
3.CONTACT RESISTANCE	:30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	:500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC WITHSTANDING RESISTANCE	:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURRABILITY	:750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER	:1 LB MIN.

ENVIRONMENTAL:

1. STORAGE	: -40℃~+85℃
2. OPERATION	: 0°C TO 70°C.

DETACHED LISTS

MM / INCH

TOLERANCES EXCEPT AS NOTED

MM	
.X ± 0.15	±
.XX ± 0.075	±
.XXX ± 0.05	±

ANGLES ± 0.5

THIRD ANGLE PROJECTION

DFTD: SHB	DATE: 2007.05.03	
CHKD: LANBO	DATE: 2007.05.03	
MFG:	DATE:	
APPVL:	DATE:	
MATERIAL :		
Q.T'Y :		
FINISH :		
SCALE :		

Coorle Technology

TITLE

56 1X4 SIDE ENTRY JACK 10P8C

DRAWING NO. TE56B1002 /PART NO.	SIZE	REV
	A3	0
DO NOT SCALE DRAWING	SHEET X OF Y	

8 7 6 5 4 3 2 1

H G F E D C B A