
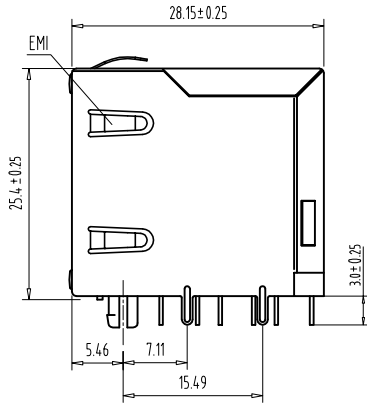


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

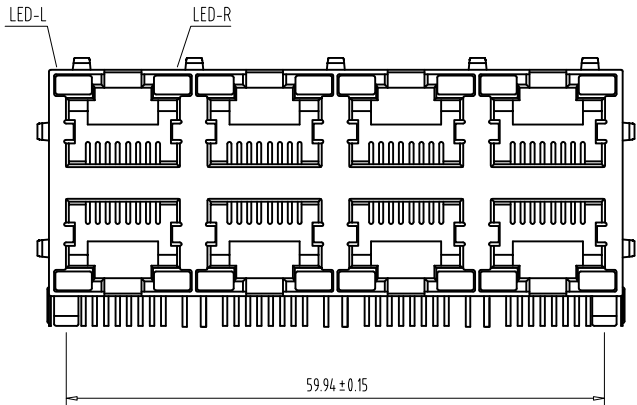

NOTES:

MATERIAL:

- | | |
|--------------------|--|
| 1.HOUSING MATERIAL | :GLASS FILLED POLYESTER UL94V-0. |
| 2.CONTACT MATERIAL | :PHOSPHOR BRONZE ϕ 0.45mm. |
| 3.PLATING | :GOLD PLATING Fu^{+50u} OVER NICKEL. |
| 4.SHIELD | :0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED. |
| 5.LED | :OPTION |

ELECTRICAL:



- | | |
|--------------------------------------|------------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :1.5 AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC . |
| 5.DIELECTRIC WITHSTANDING RESISTANCE | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:

- | | |
|----------------------------|------------------|
| 1.DURRABILITY | :750 CYCLES MIN. |
| 2.PCB RETENTION PRE-SOLDER | :1 LB MIN. |

ENVIRONMENTAL:

- | | |
|--------------|-------------|
| 1. STORAGE | : -40℃~+85℃ |
| 2. OPERATION | : 0℃ TO 70℃ |

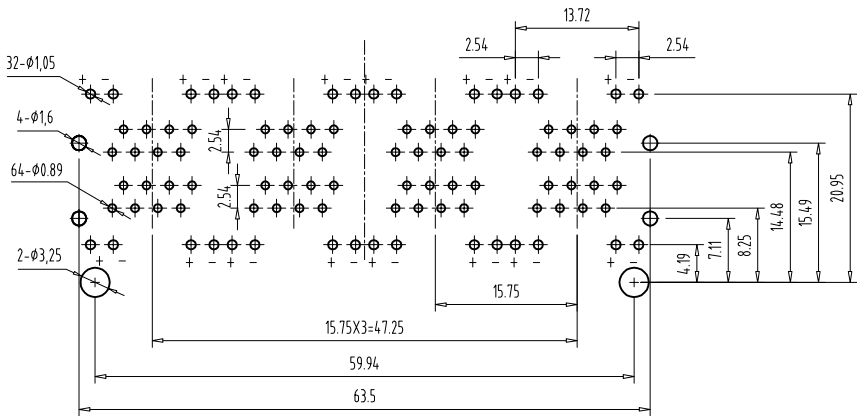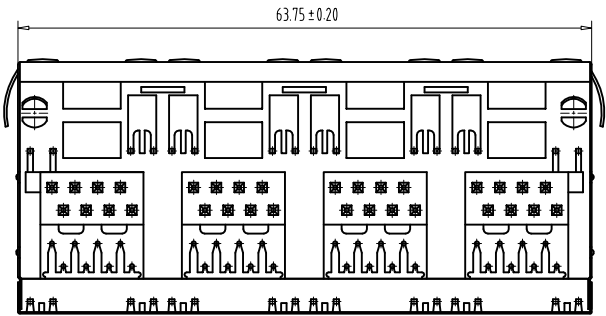

PC Board Layout
Component Side Shown

DETAILED LISTS			DFTO: SHB	DATE: 2008.03.03	Coorle Technology			
	TOLERANCES EXCEPT AS NOTED		CHKD: LAMBO	DATE: 2008.03.03				
	MM		MFO:	DATE:	TITLE			
	.0 ± 0.15		APPLV:	DATE:				
	.00 ± 0.075		MATERIAL :		59 2x4 LED JACK W/ SHIELD			
	.000 ± 0.05							
	ANGLES ± 0.5		Q.T'Y :		DRAWING NO. TESJC1001			
			FINISH :		/PART NO.			
	THIRD ANGLE PROJECTION		SCALE :		DO NOT SCALE DRAWING			
					SHEET X OF Y			