
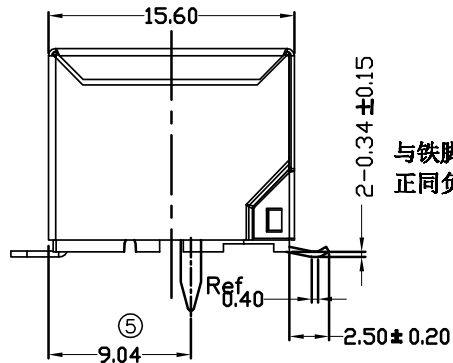
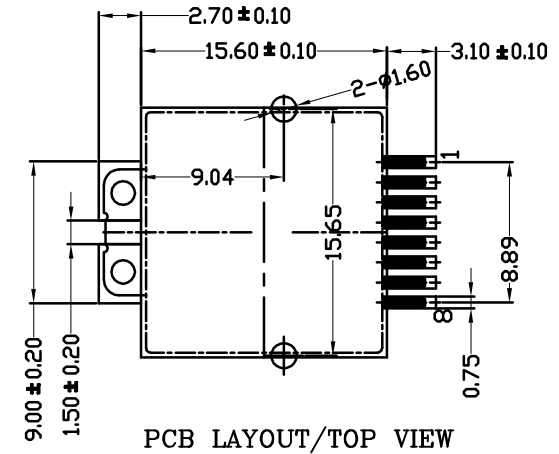



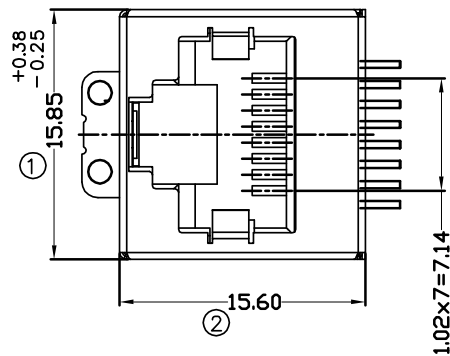

与铁脚共面，且同
正同负需要公差内

Electrical:

- 1.Voltage Rating: 125 Vac Rms
- 2.Current Rating: 1.5 Amp
- 3.Contact Resistance: 40 Milliohms Max
- 4.Insulation Resistance: 1000 Megohms Min@500 Vdc
- 5.Dielectric Strength: 1000 Vac Rms 60Hz,1Min

Mechanical:

- 1.Operating: 750 Cycles Min

Environmental:

- 1.Storage: -40°C To +85°C
- 2.Opertion: -20°C To +75°C

Mates With Modular Plug Conforming To FCC Part 68,Subpart F

Notes:

MATERIALS

- HOUSING: HIGH TEMP. THERMOPLASTIC FLAMMABILITY
UL 94V-0
- CONTACTS: PHOSPHOR BRONZE
- PLATING: GOLD PLATING OVER NICKEL IN CONTACT
TIN PLANTING OVER NICKEL IN SOLDER AREA
- SHIELD: BRASS PLATING NICKEL ALLOY

ROHS

TOLERANCE UNLESS OTHERWISE SPECIFIED		CUSTOMER COPY			Coorle Technology			
LINER	ANGLES				PROD. TOP ENTRY PCB JACK DES. (8P8C屏蔽SMT无香脚 铁脚DIP)			
0 ± 0.50	± 3°	PROJECTION			PROD. NUMBER			
.0 ± 0.38								
.00 ± 0.25								
DESIGN	PAUL HUANG	6/15/19	UNIT	SCALE	SIZE	REV.	Http://www.coorle.cn Tel: 0769-81585156 Fax: 0769-81605156	
APPRO.			MM	/	A4	C		