
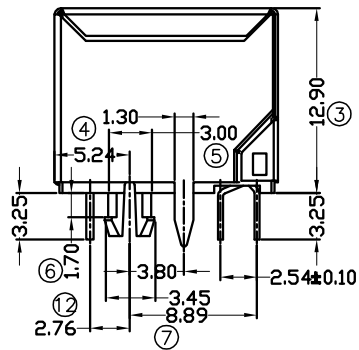


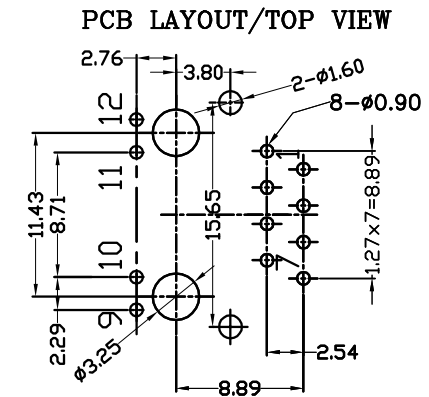

Notes:

MATERIALS

HOUSING: ENGINEERING THERMOPLASTIC FLAMMABILITY
UL 94V-0

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT
TIN PLATING OVER NICKEL IN SOLDER AREA

SHIELD: BRASS PLATING NICKEL ALLOY

Electrical:

1.Voltage Rating:	125 Vac Rms
2.Current Rating:	1.5 Amp
3.Contact Resistance:	40 Milliohms Max
4.Insulation Resistance:	1000 Megohms Min@500 Vdc
5.Dielectric Strength:	1000 Vac Rms 60Hz,1Min


Mechanical:

1.Operating: 750 Cycles Min

Environmental:

1.Storage: -40°C To +85°C
2.Opertion: -20°C To +75°C

Mates With Modular Plug Conforming To FCC Part 68, Subpart F

TOLERANCE UNLESS OTHERWISE SPECIFIED		CUSTOMER COPY			Coorle Technology		
LINER	ANGLES				PROD. TOP ENTRY PCB JACK DESCRIP. (8P8C屏蔽带灯左黄右绿)		
0 ± 0.50	± 3°	PROJECTION 			PROD. NUMBER		
.0 ± 0.38							
.00 ± 0.25							
DESIGN	PAUL HUANG	6/15/19	UNIT	SCALE	SIZE	REV.	Http://www.coorle.cn Tel: 0769-81585156 Fax: 0769-81605156
APPRO.			MM	/	A4	C	