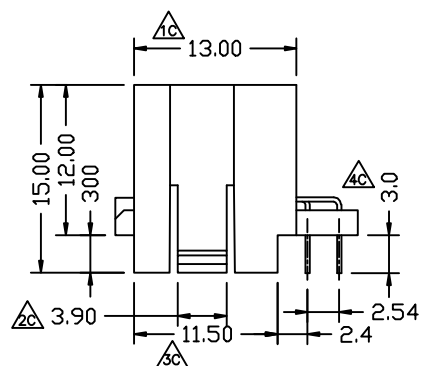
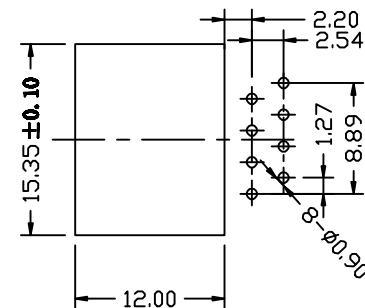
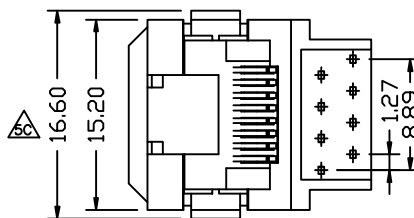



#### Electrical:

- 1.Voltage Rating: 125 Vac Rms
- 2.Current Rating: 1.5 Amp
- 3.Contact Resistance: 40 Milliohms Max
- 4.Insulation Resistance: 1000 Megohms Min@500 Vdc
- 5.Dielectric Strength: 1000 Vac Rms 60Hz,1Min

#### Mechanical:

- 1.Operating: 750 Cycles Min

#### Environmental:

- 1.Storage: -40°C To +85°C
- 2.Opertion: -20°C To +75°C

Mates With Modular Plug Conforming To FCC Part 68,Subpart F

#### Notes:

#### MATERIALS

HOUSING: ENGINEERING THERMOPLASTIC FLAMMABILITY  
UL 94V-0

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT  
TIN PLANTING OVER NICKEL IN SOLDER AREA

**ROHS**

| TOLERANCE UNLESS<br>OTHERWISE SPECIFIED |            | CUSTOMER<br>COPY |      |       | Coorle Technology                                   |      |                                          |  |
|-----------------------------------------|------------|------------------|------|-------|-----------------------------------------------------|------|------------------------------------------|--|
| LINER                                   | ANGLES     |                  |      |       | PROD. BOTTOM ENTRY PCB JACK<br>DESCRIP. (RJ45 8P8C) |      |                                          |  |
| 0 ± 0.50                                | ± 3°       | PROJECTION       |      |       | PROD.<br>NUMBER                                     |      |                                          |  |
| .0 ± 0.38                               |            |                  |      |       |                                                     |      |                                          |  |
| .00 ± 0.25                              |            |                  |      |       |                                                     |      |                                          |  |
| DESIGN                                  | PAUL HUANG | 6/15/19          | UNIT | SCALE | SIZE                                                | REV. | Http://www.coorle.cn                     |  |
| APPRO.                                  |            |                  | MM   | /     | A4                                                  | C    | Tel: 0769-81585156<br>Fax: 0769-81605156 |  |