



| 記號<br>MARK | ECN NO. | 日期<br>DATE | 修改<br>DRAW | 核准<br>APPROVE |
|------------|---------|------------|------------|---------------|
|            |         |            |            |               |
|            |         |            |            |               |
|            |         |            |            |               |

印章

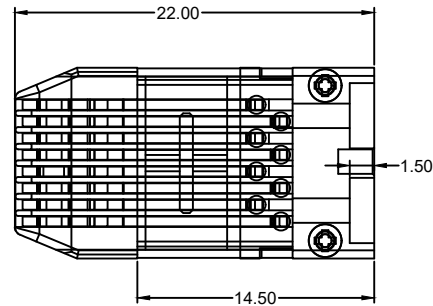

#### FEATURES:

##### 1 Electrical Test:

- A. Safety Voltage/Current Rating 150V ac, at 1.5A.
- B. Dielectric with standing 1000V/DC/min, <0.5A.
- C. Insulation Resistance: >500MΩ, 1000V./min
- D. Contact Resistance: <20MΩ

##### 2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability: 750 mating cycles.
- 3 Operation Temperature: -40℃ ~ +85℃.
- 4 Environmental compliance
- A. the products are compliant with the RoHS, and REACH ETC.

#### 特征:







##### 1 电气特性:

- A. 额定电压150伏特AC. 额定电流1.5A
- B. 耐电压测试: 小于0.5安培1000伏特DC/一分钟.
- C. 绝缘抗阻: 1000伏特DC/一分钟, 大于500百萬歐姆
- D. 接觸陰坑: 不大于20mΩ (毫歐姆)

##### 2 機械特性:

- A. 拉力测试-電纜至插座張力強度至少一分钟20磅 (89N)
- B. 耐力测试-拔插测试750次以上.
- 3 使用温度范围: -40℃ ~ +85℃
- 4 环保符合性:

- A. 产品符合RoHS, REACH等环保规格.

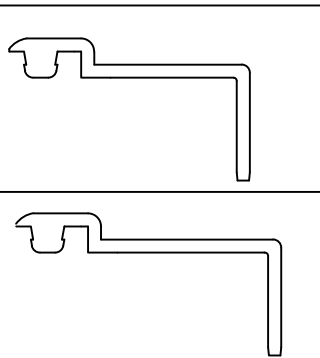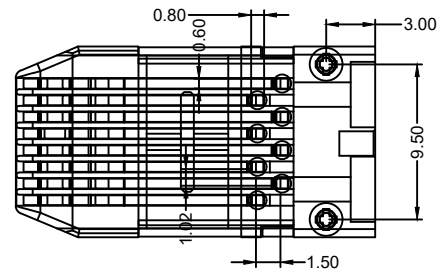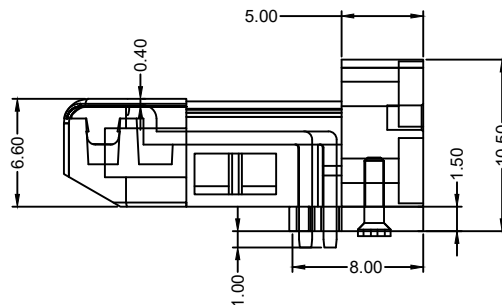

|                                                                                                                                                                                                      |                                                 |                                                           |   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------------------|---|
| <input checked="" type="checkbox"/> 屏蔽壳<br>Shell                                                                                                                                                     | <input checked="" type="checkbox"/> 黄铜<br>Brass | <input type="checkbox"/> 铁<br>Spcc                        | 1 |
| <input type="checkbox"/> Au: <input type="checkbox"/> G/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input checked="" type="checkbox"/> Ni <input checked="" type="checkbox"/> 80u" |                                                 |                                                           |   |
| <input checked="" type="checkbox"/> 胶壳 PC(聚碳酸酯)                                                                                                                                                      | <input checked="" type="checkbox"/> 94-V0 (LCP) |                                                           | 1 |
| <input type="checkbox"/> 金片 (PIN针)<br>Contacts                                                                                                                                                       | <input type="checkbox"/> 黄铜<br>Brass            | <input checked="" type="checkbox"/> 磷铜<br>Phosphor copper |   |
| <input type="checkbox"/> G/F" <input type="checkbox"/> 1u" <input checked="" type="checkbox"/> 3u" <input type="checkbox"/> 6u"                                                                      |                                                 |                                                           | 8 |
| <input type="checkbox"/> 15u" <input type="checkbox"/> 30u" <input type="checkbox"/> 50u" <input type="checkbox"/> OTHER                                                                             |                                                 |                                                           |   |

#### Dong Guan City Coorle Electronic Tech.Co.,Ltd

ADD: No.1 Building Schindler Songshanlake town, DongGuan City,GuangDong Province  
Tel:+86-0769-81605156; Fax:+86-0769-81605156 WWW.COORLE.CN

|                                                                  |  |                                 |            |             |             |             |             |     |
|------------------------------------------------------------------|--|---------------------------------|------------|-------------|-------------|-------------|-------------|-----|
| 品名规格<br>DESCRIPTION                                              |  | FTP 8P8C 插板式水晶头 90°             |            |             |             | 页次<br>SHEET | 1/1         |     |
| 产品编号<br>PRODUCT NO                                               |  |                                 | 单位<br>UNIT | mm          | 比例<br>SCALE | 1:1         | 版本<br>EDITI | A/0 |
| DIMENSION IN mm(Inch)<br>TOLERANCE UNLESS<br>OTHERWISE SPECIFIED |  | 第三视角法<br>THIRD ANGLE PROJECTION |            | 制图<br>DRAWN |             | 日期<br>DATE  | 2021. 7. 25 |     |
| x. x ±0.25                                                       |  | ANGLES                          |            | 核对<br>CHECK |             | 日期<br>DATE  | 2021. 7. 25 |     |
| x. xx ±0.2                                                       |  | X.±0°                           |            | 批准<br>APPRO |             | 日期<br>DATE  | 2021. 7. 25 |     |
| x. xxx ±0.12                                                     |  | X.±0.0°                         |            |             |             |             |             |     |