

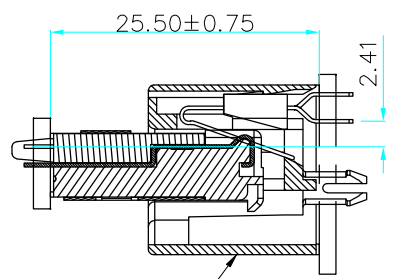






記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

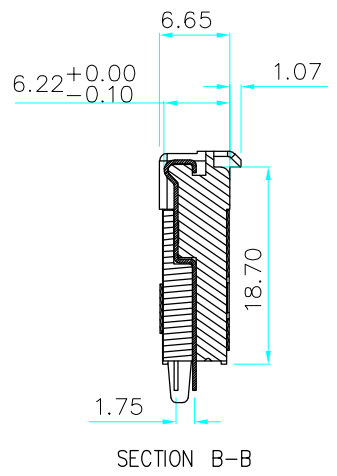


FRE FAMILY P/N: E5288

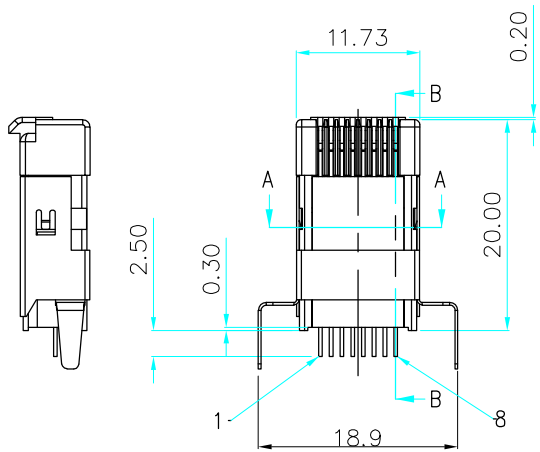



SECTION B-B

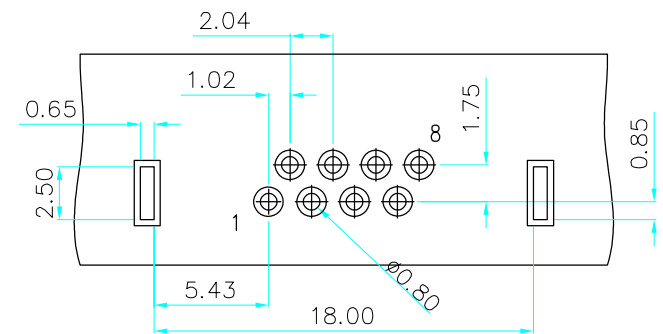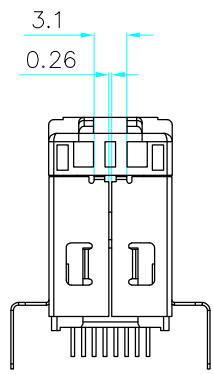

PCB Layout View
Component Side Show
SCALE 4:1



SECTION A-A



DETAIL D
SCALE 8:1


FEATURES:
1 Electrical Test:
A. Safety Voltage/Current Rating 150V ac, at 1.5A.
B. Dielectric with standing 1000V/DC/min, <0.5A.
C. Insulation Resistance: >500MΩ, 1000V./min
D. Contact Resistance: <20MΩ
3 Operation Temperature: -40℃~+85℃.
4. Environmental compliance
A. the products are compliant with the RoHS, and REACH ETC.

胶壳 LCP	☒ 94-V0 ☐ 94-V2	1
金片 (PIN针) Contacts	☐ 黄铜 ☒ 磷铜 Brass Phosphor copper	8
☐ G/F" ☒ 1u" ☐ 3u" ☐ 6u"		
☐ 15u" ☐ 30u" ☐ 50u" ☐ OTHER		

Coorle Technology

Dong Guan City Coorle Electronic Tech.Co.,Ltd

ADD: No.1 Building Schindler Songshanlake town, DongGuan City,GuangDong Province
Tel:+86-0769-81605156; Fax:+86-0769-81605156 WWW.COORLE.CN

品名规格 DESCRIPTION		FTP RJ45 插板式水晶头					页次 SHEET	1/1
产品编号 PRODUCT NO		单位 UNIT		mm	比例 SCALE	1:1	版本 EDITI	A/O
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED x. x ±0.2 x. xx ±0.1 x. xxx ±0.05		第三视角法 THIRD ANGLE PROJECTION 		制图 DRAWN			日期 DATE	
				核对 CHECK			日期 DATE	
				批准 APPRO			日期 DATE	