


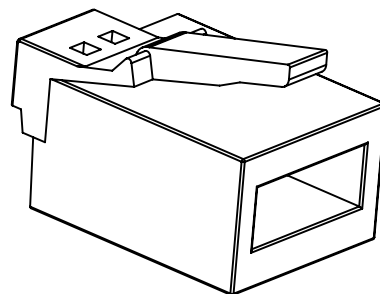




成品圖

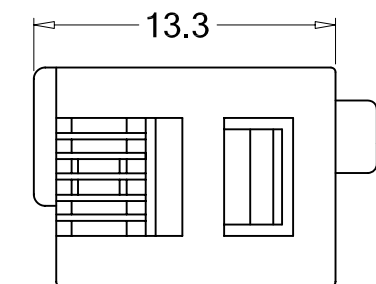

F



R

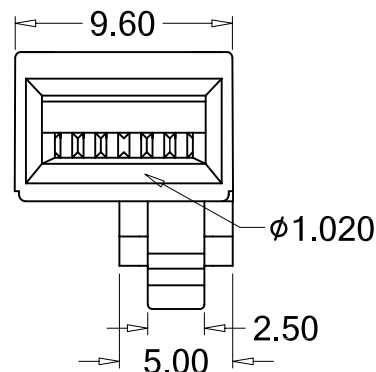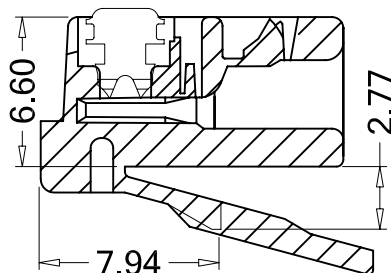

Complies with F.C.C standards of part 68.500

Electrical:

1. Voltage rating : 125 VAC RMS .
2. Current rating : 1.5 A .
3. Contact resistance : 50 milliohms max.
4. Insulation resistance : 1000 megaohms min @ 500 VDC.
5. Dielectric strength : 1000 VAC RMS 50Hz, 1MIN.

Material & finish:

Housing: PC, clear

Contact : copper alloy plated with gold

Operating temperature:-40 °C to +80 °C

未注公差 (mm)		Coorle Technology			TITEL	PLUG		
X	±0.30	TEL: 0769-81585156 FAX: 0769-81605156			品名			
.X	±0.20				PART NO.			
.XX	±0.15	核 准		審 查	設 計	WU	DATE	2011/03/10
.XXX	±0.05						SCALE	REV
	±2.0						1:1	B.0