

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A0		NEW	WANG	2024-04-23

A

B

C







D

A


B

C

D

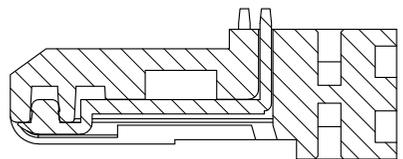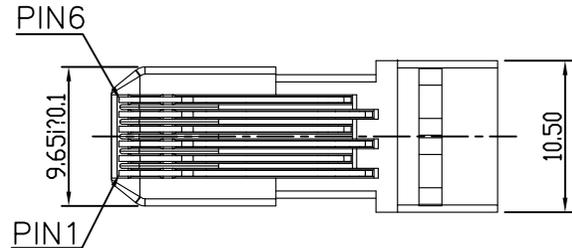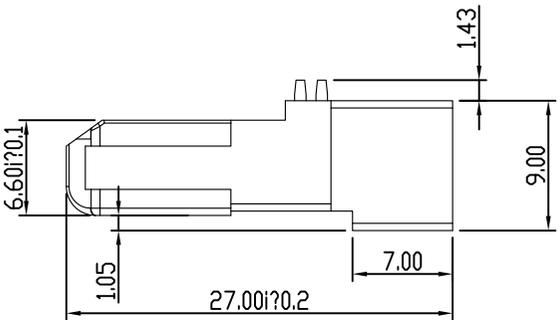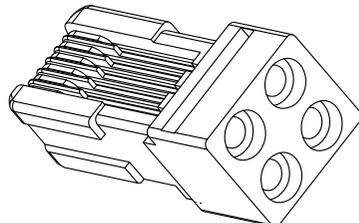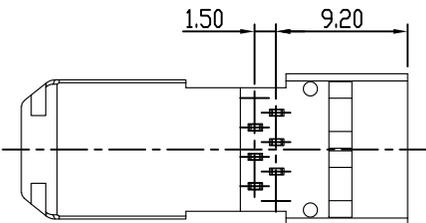

- 备注:
- 电气特性
 - 额定电压: 150 VAC RMS
 - 额定电流: 1.5 AMP
 - 接触电阻: 最大20毫欧
 - 绝缘电阻: 最小1000兆欧@500V DC
 - 耐压端子与其余端子: 1000V DC/AC PEAK @0.5mA 50 OR 60Hz 1Minute
 - 机械性能
 - 配合强度: 50N FOR 60S±5S
 - 使用寿命: 5000次
 - 插拔力: 30N MAX.
 - 环境性能
 - 工作环境温度: -25℃~+55℃
 - 储运环境温度: -10℃~+40℃ 相对湿度<80%
 - 储存时间: 12个月

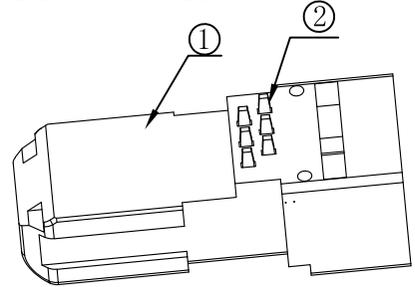


3				
2	RJ45金片	6	铜合金 T=0.40 MM	镀金
1	RJ45插头	1	尼龙环保料	黑色
序号	物料名称	数量	物料材质	备注

设计DR. Tom Y 2024.04.23
 核准APPD. WANG WEI 2024.04.23

公差.	TOLERANCE
.XXX	±0.15
.XX	±0.25
.X	±0.38
X	±0.50
ANG	±3°

品名 ARTICLE RJ12 6P6C 90度插头

Coorle Technology



图号 DWG NO. A0XX-XX-SY

单位 UNIT	比例 SCALE	页数 SHEET	版本 REV.
mm	1:1	1/1	A0

1

2

3

4

5

6