

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A0		NEW	WANG	2024-04-23

A

B

C



D

A

B







C

D

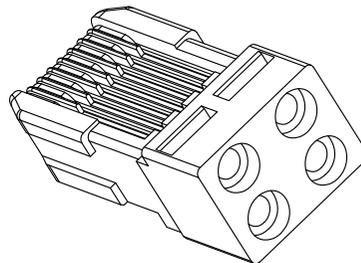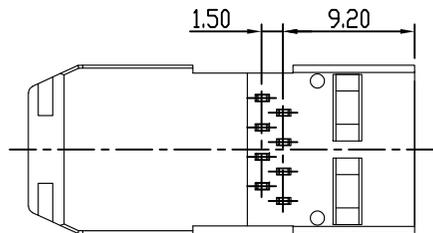

备注:

1. 电气特性
 - 1.1 额定电压: 150 VAC RMS
 - 1.2 额定电流: 1.5 AMP
 - 1.3 接触电阻: 最大20毫欧
 - 1.4 绝缘电阻: 最小1000兆欧@500V DC
 - 1.5 耐压端子与其余端子: 1000V DC/AC PEAK @0.5mA 50 OR 60Hz 1Minute
2. 机械性能
 - 2.1 配合强度: 50N FOR 60S±5S
 - 2.2 使用寿命: 5000次
 - 2.3 插拔力: 30N MAX.
3. 环境性能
 - 3.1 工作环境温度: -25℃~+55℃
 - 3.2 储运环境温度: -10℃~+40℃ 相对湿度<80%
 - 3.3 储存时间: 12个月

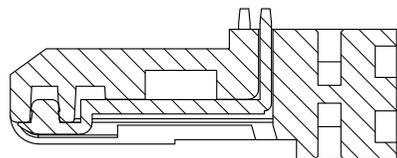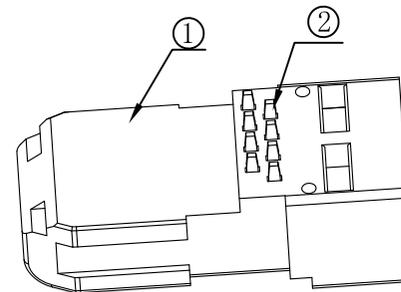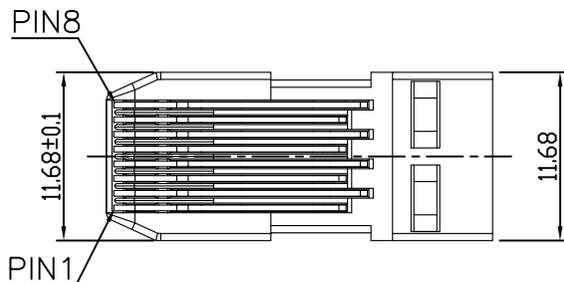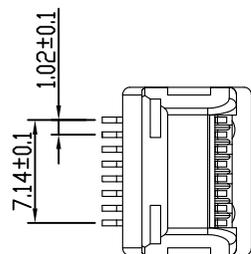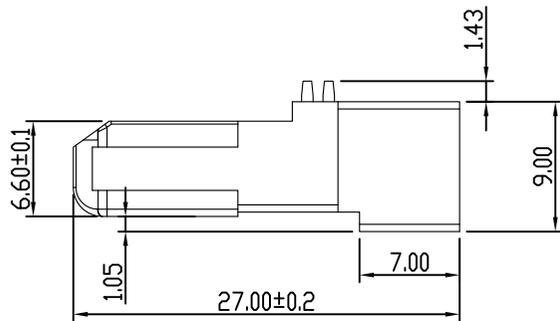

3				
2	RJ45金片	8	铜合金 T=0.40 MM	镀金
1	RJ45插头	1	尼龙环保料	黑色
序号	物料名称	数量	物料材质	备注

设计DR.
Tom Y
2024.04.23


核准APPD.
WANG WEI
2024.04.23

公差. TOLERANCE
.XXX ±0.15
.XX ±0.25
.X ±0.38
X ±0.50
ANG ±3°

品名
ARTICLE RJ45 8P8C 90度插头

图号
DWG NO. SY-A0XX-XX

Coorle Technology



单位 UNIT	比例 SCALE	页数 SHEET	版本 REV.
mm	1:1	1/1	A0

1

2

3

4

5

6