


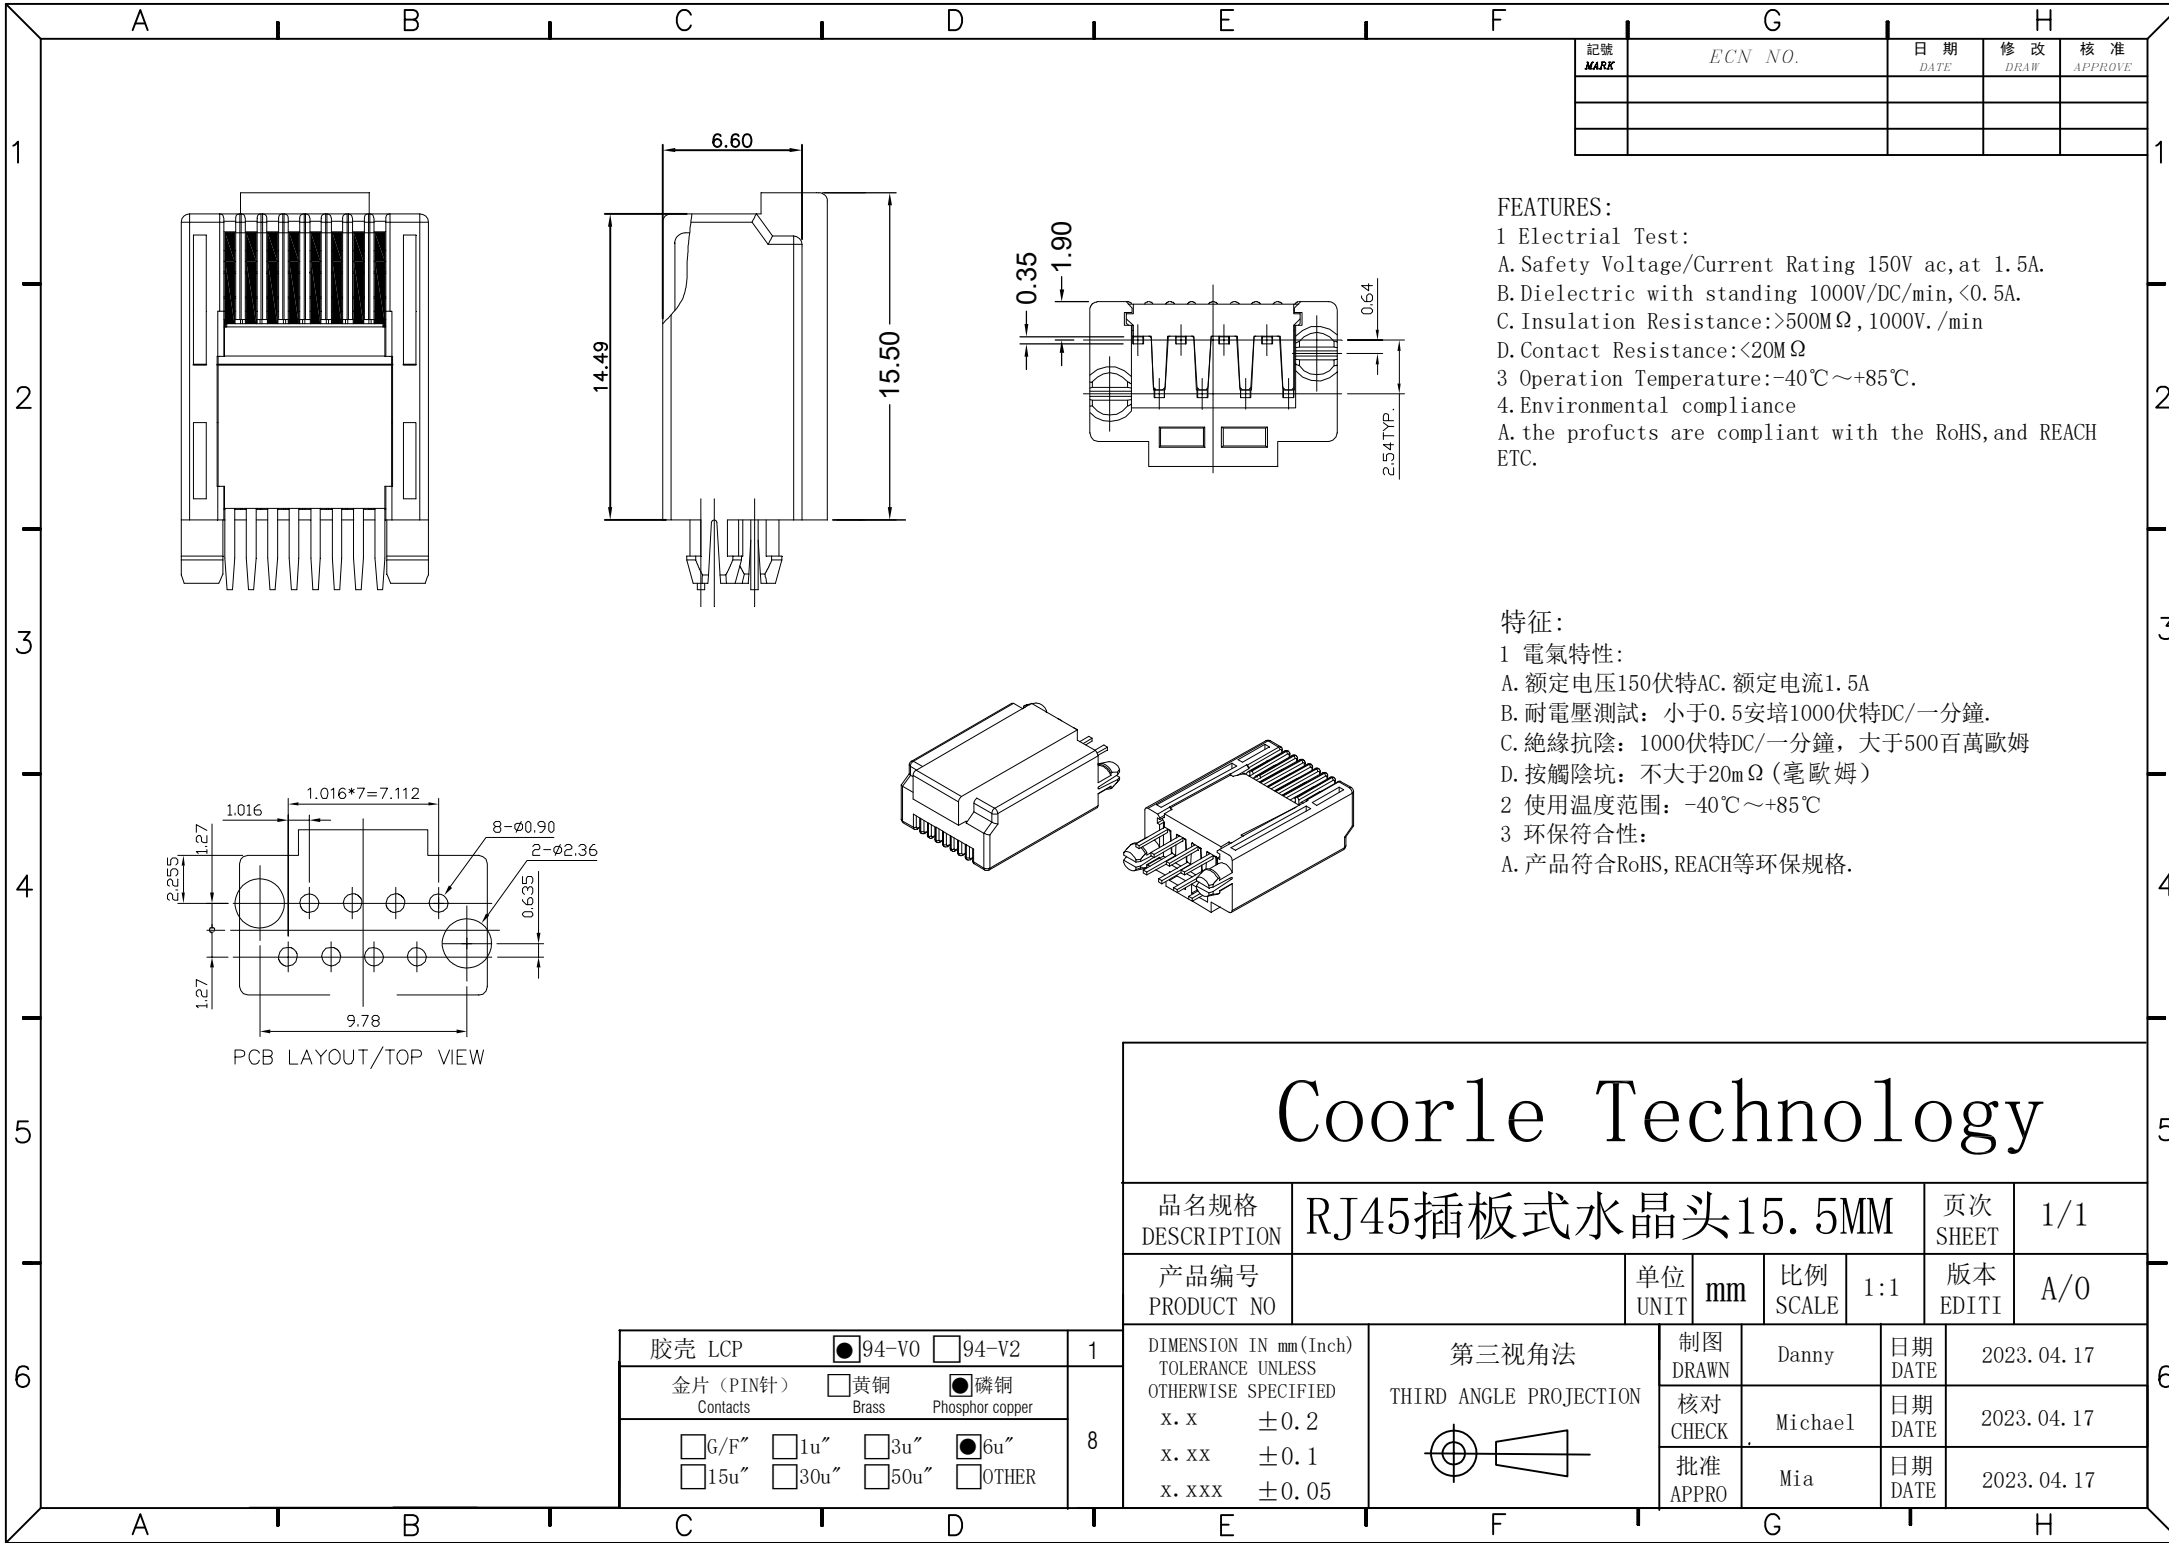


記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

FEATURES:
1 Electrical Test:
A. Safety Voltage/Current Rating 150V ac, at 1.5A.
B. Dielectric with standing 1000V/DC/min, <0.5A.
C. Insulation Resistance: >500MΩ, 1000V./min
D. Contact Resistance: <20MΩ
3 Operation Temperature: -40℃ ~ +85℃.
4. Environmental compliance
A. the products are compliant with the RoHS, and REACH ETC.

特征:
1 電氣特性:
A. 额定电压150伏特AC. 额定电流1.5A
B. 耐電壓測試: 小于0.5安培1000伏特DC/一分鐘.
C. 絕緣抗陰: 1000伏特DC/一分鐘, 大于500百萬歐姆
D. 按觸陰坑: 不大于20mΩ (毫歐姆)
2 使用温度范围: -40℃ ~ +85℃
3 环保符合性:
A. 产品符合RoHS, REACH等环保规格.

Coorle Technology

胶壳 LCP	☒ 94-V0	☐ 94-V2	1
金片 (PIN针) Contacts	☐ 黄铜 Brass	☒ 磷铜 Phosphor copper	8
☐ G/F"	☐ 1u"	☐ 3u"	☒ 6u"
☐ 15u"	☐ 30u"	☐ 50u"	☐ OTHER

品名规格 DESCRIPTION		RJ45插板式水晶头15.5MM				页次 SHEET	1/1
产品编号 PRODUCT NO		单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED x. x ±0.2 x. xx ±0.1 x. xxx ±0.05		第三视角法 THIRD ANGLE PROJECTION 		制图 DRAWN	Danny	日期 DATE	2023.04.17
				核对 CHECK	Michael	日期 DATE	2023.04.17
				批准 APPRO	Mia	日期 DATE	2023.04.17