
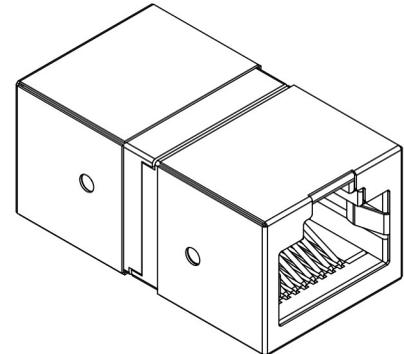


1 2 3 4 5 6

A

A

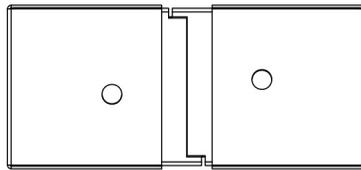

电气特性:




- 1. 工作电压: 125 VAC
- 2. 工作电流: 1.5 A
- 3. 工作温度: -55°C~125°C
- 4. 绝缘电阻: 1000 MΩ MIN.@500 VDC
- 5. 耐压强度: 700V(50Hz AC, 针与针间);
1000V (50Hz AC, 针与外壳间)

材料要求

- 1. 塑壳材质: 高温料黑色 , UL94V-0 ;
- 2. 金针材质: 磷青铜, 直径0.46mm 镀金;
- 3. 外壳材质: 不锈钢, 厚度0.20mm ;



B

B

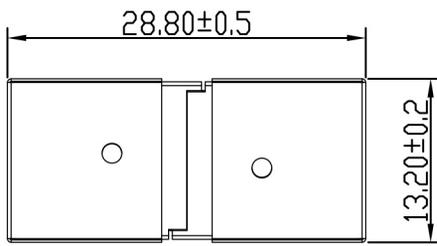


C

C

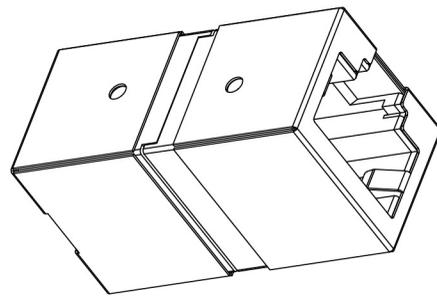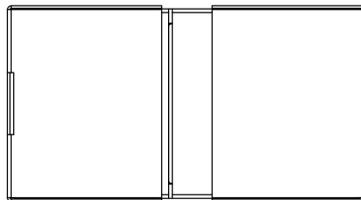

D

D

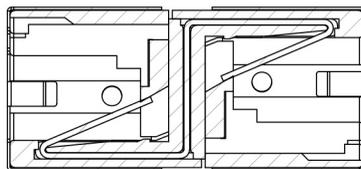

1 2 3 4 5 6

设计DR.	核准APPD.	公差. TOLERANCE	品名
		.XXX ±0.15	ARTICLE RJ45-Z1 长28.8mm YW121
		.XX ±0.25	图号
		.X ±0.38	
		X ±0.50	单位 UNIT
		ANG ±3'	比例 SCALE
			页数 SHEET
			版本 REV.
TEL: 0769-81585156 FAX: 0769-81605156			mm 1:1 1/1 A0