


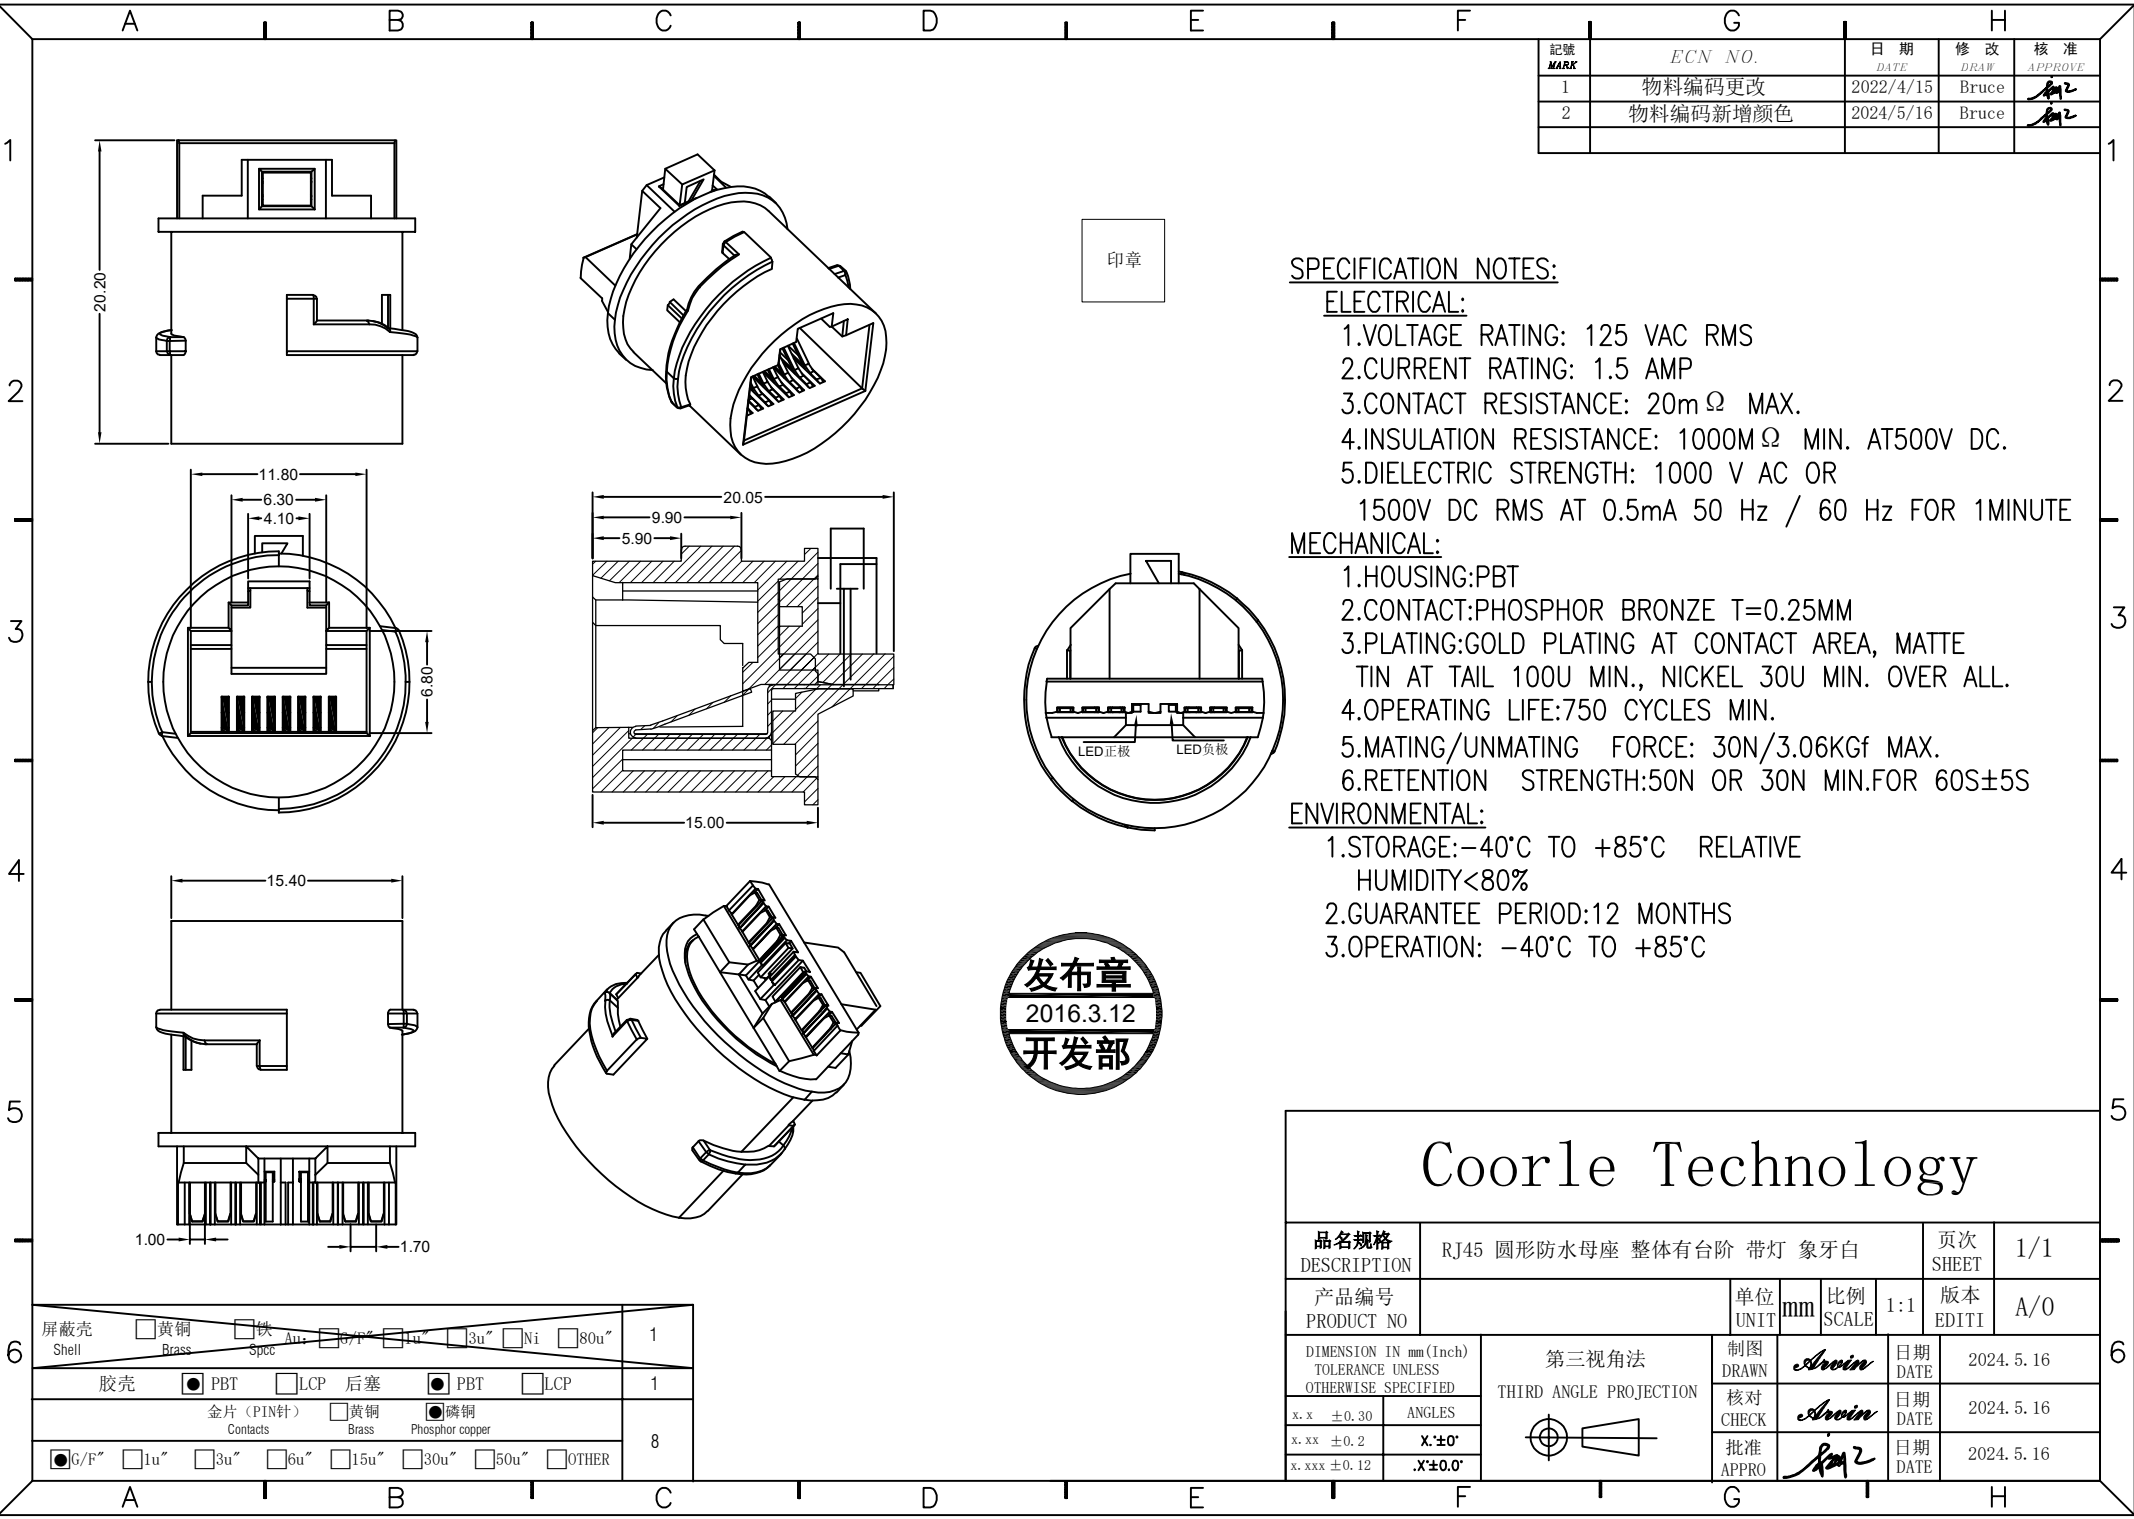

記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE
1	物料编码更改	2022/4/15	Bruce	批
2	物料编码新增颜色	2024/5/16	Bruce	批

SPECIFICATION NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING: 125 VAC RMS
- 2.CURRENT RATING: 1.5 AMP
- 3.CONTACT RESISTANCE: 20mΩ MAX.
- 4.INSULATION RESISTANCE: 1000MΩ MIN. AT500V DC.
- 5.DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1MINUTE

MECHANICAL:


- 1.HOUSING:PBT
- 2.CONTACT:PHOSPHOR BRONZE T=0.25MM
- 3.PLATING:GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100U MIN., NICKEL 30U MIN. OVER ALL.
- 4.OPERATING LIFE:750 CYCLES MIN.
- 5.MATING/UNMATING FORCE: 30N/3.06KGf MAX.
- 6.RETENTION STRENGTH:50N OR 30N MIN.FOR 60S±5S

ENVIRONMENTAL:

- 1.STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
- 2.GUARANTEE PERIOD:12 MONTHS
- 3.OPERATION: -40°C TO +85°C



Coorle Technology

品名规格 DESCRIPTION		RJ45 圆形防水母座 整体有台阶 带灯 象牙白					页次 SHEET	1/1		
产品编号 PRODUCT NO				单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0	
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		第三视角法 THIRD ANGLE PROJECTION 		制图 DRAWN	Arwin	日期 DATE	2024. 5. 16			
x. x ±0.30				ANGLES		核对 CHECK	Arwin	日期 DATE	2024. 5. 16	
x. xx ±0.2				X'±0'		批准 APPRO	日期 DATE	2024. 5. 16		
x. xxx ±0.12				.X'±0.0'						

屏蔽壳 Shell	☐ 黄铜 Brass	☐ 铁 Spcc	Au: ☐ 6/p" ☐ 1u" ☐ 3u" ☐ Ni ☐ 80u"	1
胶壳	☒ PBT	☐ LCP	后塞 ☒ PBT ☐ LCP	1
金片 (PIN针) Contacts	☐ 黄铜 Brass	☒ 磷铜 Phosphor copper		8
☒ G/F" ☐ 1u" ☐ 3u" ☐ 6u" ☐ 15u" ☐ 30u" ☐ 50u" ☐ OTHER				